Part No.	(6)Length	Part No.	(6)Length
3129-0.5	0.5M	3129-5	5M
3129-1	1M	3129-10	10M
3129-2	2M	3129-15	15M

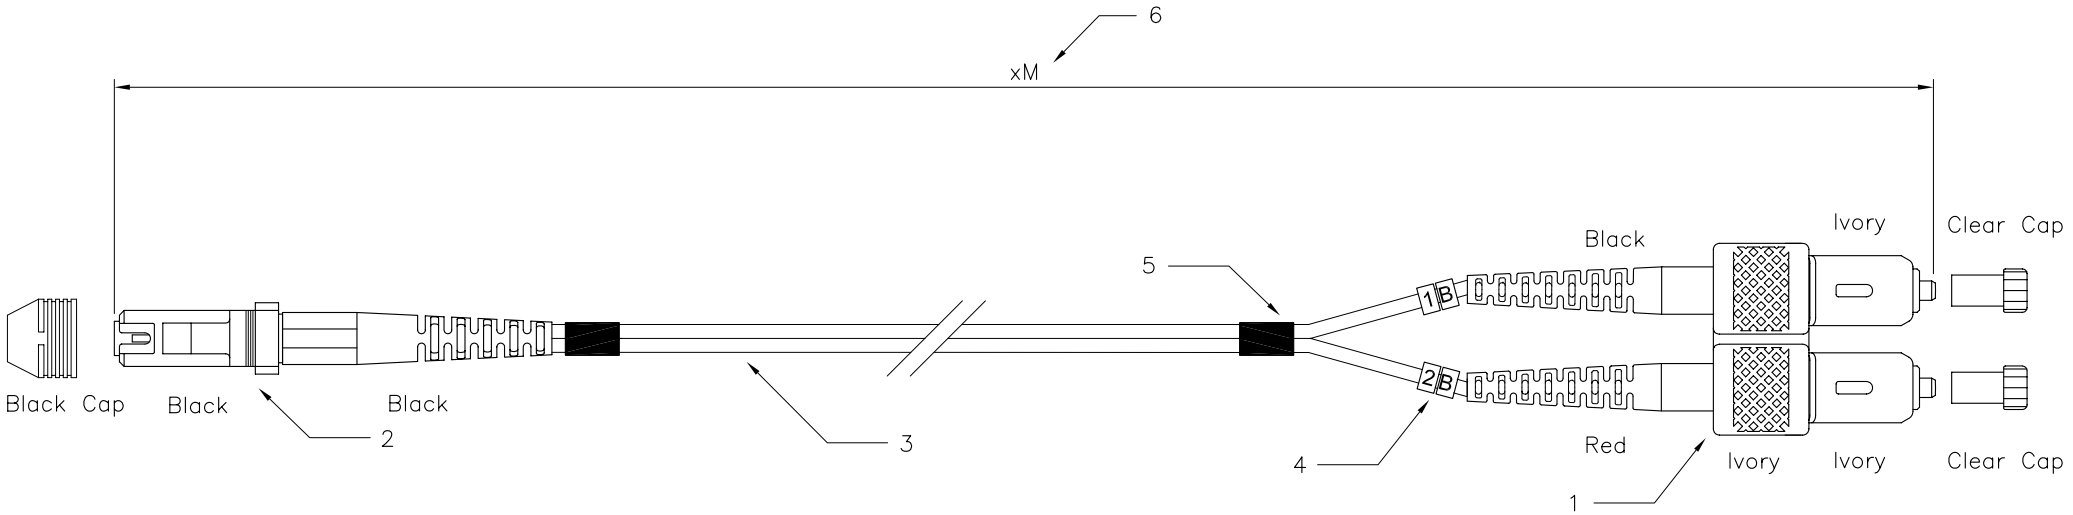

Specification:

1. Connector Type : Ⅱ SC/PC Multimode
2. Connector Type : MTRJ/PC Multimode
3. Cable Type :
   3-1 Zipcord cable, ø1.8mm, 62.5/125um Multimode
   3-2 Calbe Jacket : Gray color, LSZH material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

a. Insertion Loss : <0.5 dB
b. Fiber Extention : −0.05um < H < +0.05um
c. Ferrule End-face Radius : 10 < R < 25mm
d. Apex Offset : < 50um
e. Increase in insertion loss after 500 mating : 0.2 dB Max.
f. Operation Temperature : −20° to +70°
g. Storage Temperature : −40° to +80°

RoHS Compliant

UNIT M/M	DSGN	CSQ	21.MAY.2007	ITEM NO: 3129
SCALE 1/1	CHK	Maer	21.MAY.2007	SC to MTRJ Duplex patch cord
DWG NO: 3129	APPR	Yty	21.MAY.2007	Videk Ltd